RXLB-A Thin Aluminum-Housed Wirewound Resistor

Features

- Excellent high-temperature load performance.
- High overload capability.
- RoHS compliant.
- Compact appearance and easy installation.


Applications

- Power distribution and load testing.
- Power supplies and inverter power supplies.
- Soft starting and braking in industrial servo drive systems.



Power range: 10-50 W

Outline Dimensions • mm

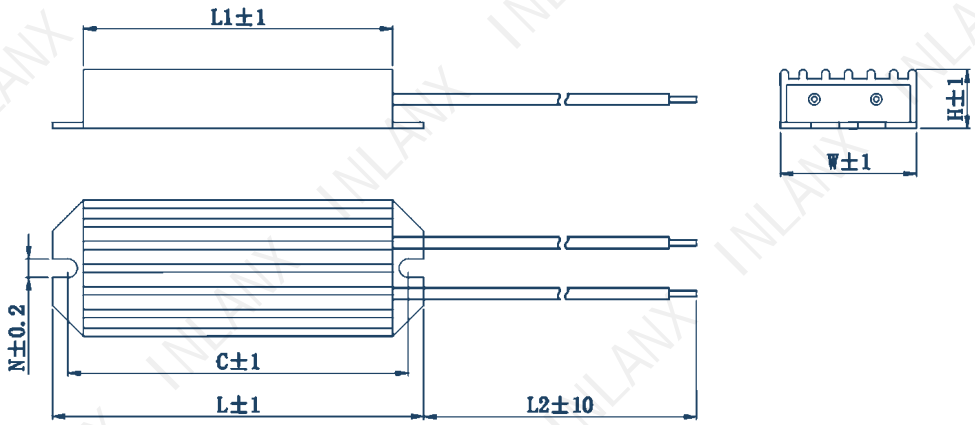

Specifications and Dimensions

Power W	Resistance Ω	L mm	L1 mm	W mm	H mm	C mm	N mm	L2 mm
10	1Ω-100Ω	32	22	22	9.5	27	3.0	Custom
20	1Ω-100Ω	40	30	22	9.5	35	3.0	Custom
35	1Ω-100Ω	50	40	22	9.5	45	3.0	Custom
50	1Ω-100Ω	60	50	22	9.5	55	3.0/4.0	Custom

Dimensions in mm; lead length can be customized. Resistance tolerance: ±5% (J), ±10% (K).

Ordering Example

RXLB-A - 20W - 50Ω - ±5%

Model / Power / Nominal resistance / Tolerance