RXLG-C Aluminum-Housed Wirewound Resistor

Features

- Excellent high-temperature load performance.
- High overload capability.
- RoHS compliant.
- Compact appearance and easy installation.


Applications

- Power distribution and load testing.
- Power supplies and inverter power supplies.
- Soft starting and braking in industrial servo drive systems.



Power range: 500-1500 W

Outline Dimensions • mm

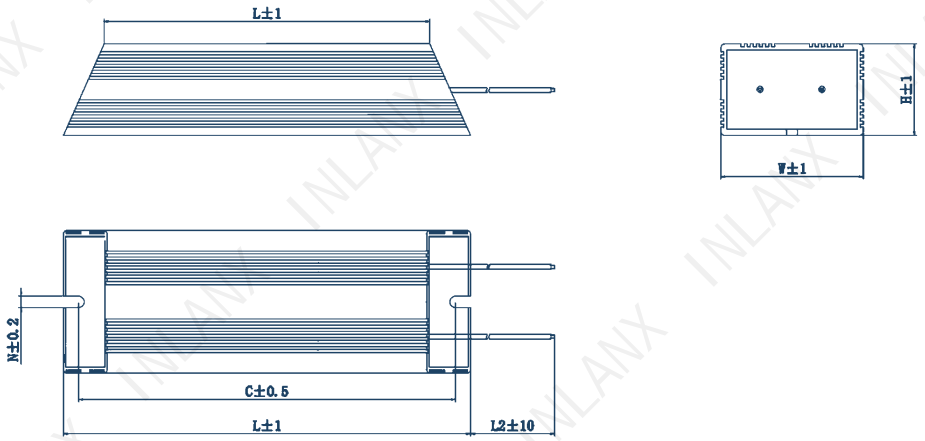

Specifications and Dimensions

Power W	Resistance Ω	L mm	L1 mm	W mm	H mm	C mm	N mm	L2 mm	Net wt. g
500	1Ω-1kΩ	200	180	70	45	185	5.6	Custom	1450
600	1Ω-1kΩ	240	220	70	45	225	5.6	Custom	1750
800	1Ω-1kΩ	280	260	70	45	265	5.6	Custom	2050
1000	1Ω-1kΩ	350	330	70	45	335	5.6	Custom	2550
1200	1Ω-1kΩ	400	380	70	45	385	5.6	Custom	2900
1500	1Ω-1kΩ	500	480	70	45	485	5.6	Custom	3100

Dimensions in mm; lead length can be customized. Resistance tolerance: ±5% (J), ±10% (K).

Ordering Example

RXLG-C - 500W - 50Ω - ±5%

Model / Power / Nominal resistance / Tolerance