RXFB Thin Aluminum-Housed Wirewound Resistor

Features

- Excellent high-temperature load performance.
- High overload capability.
- RoHS compliant.
- Compact appearance and easy installation.


Applications

- Power distribution and load testing.
- Power supplies and inverter power supplies.
- Soft starting and braking in industrial servo drive systems.
- Power battery packs and new energy vehicles.



Power range: 50-200 W

Outline Dimensions • mm

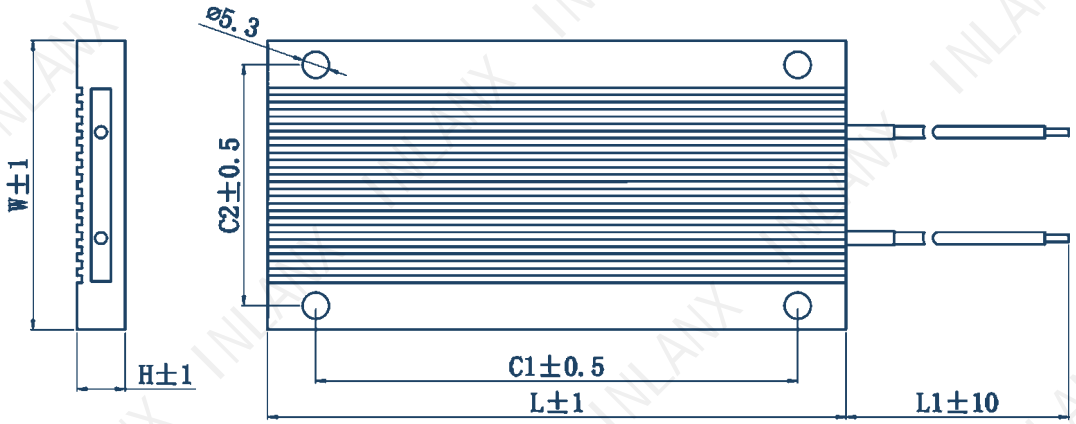

Specifications and Dimensions

Power W	Resistance Ω	L mm	W mm	H mm	C1 mm	C2 mm	L1 mm
50	1Ω-100Ω	70	60	10	50	50	Custom
100	1Ω-100Ω	120	60	10	100	50	Custom
150	1Ω-100Ω	170	60	10	150	50	Custom
200	1Ω-100Ω	150	80	10	130	70	Custom

Dimensions in mm; lead length can be customized. Resistance tolerance: ±5% (J), ±10% (K).

Ordering Example

RXFB - 100W - 50Ω - ±5%

Model / Power / Nominal resistance / Tolerance