RXFB-4(4B) Thin Aluminum-Housed Wirewound Resistor

Features

- Excellent high-temperature load performance.
- High overload capability.
- RoHS compliant.
- Compact appearance and easy installation.


Applications

- Power distribution and load testing.
- Power supplies and inverter power supplies.
- Soft starting and braking in industrial servo drive systems.



Power range: 40-150 W

Outline Dimensions • mm

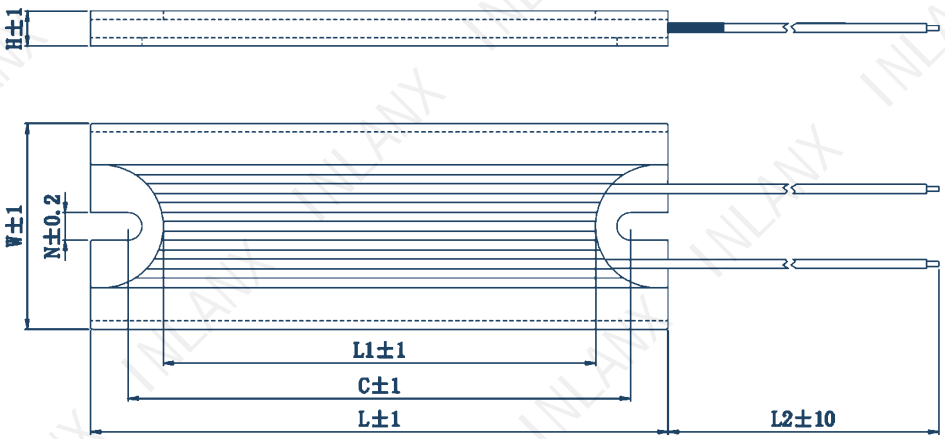

Specifications and Dimensions

Type	Power W	Resistance Ω	L mm	W mm	H mm	C mm	N mm	L2 mm	L1 mm
RXFB-4	40	1Ω-1kΩ	61	26	7	55	3.5	Custom	47
RXFB-4	60	1Ω-1kΩ	72.5	27.5	11	65	3.5	Custom	59.5
RXFB-4	100	1Ω-1kΩ	100	27.5	11	86.5	3.5	Custom	80
RXFB-4B	60	1Ω-1kΩ	115	41	7	100	4.5	Custom	86
RXFB-4B	80	1Ω-1kΩ	140	41	7	125	4.5	Custom	111
RXFB-4B	100	1Ω-1kΩ	165	41	7	150	4.5	Custom	140
RXFB-4B	120	1Ω-1kΩ	190	41	7	175	4.5	Custom	165
RXFB-4B	150	1Ω-1kΩ	215	41	7	200	4.5	Custom	190

Dimensions in mm; lead length can be customized. Resistance tolerance: ±5% (J), ±10% (K).

Ordering Example

RXFB-4 - 100W - 50Ω - ±5%

Model / Power / Nominal resistance / Tolerance